

Pièces détachées : KIT 5

Kit d'arrêt mural, 1/4 de tour, partie encastrée.


Wall mounted kit, 1/4 turn, built in part.

Compatible pour / Compatible for :

Sky : S01, S02, S03, S05, S06, S07, S08, S09, S10, S11, S12, S13, S15, S16, S19, S20, S21, S22, S23, S24, S25, S27, S28.

Square : S31, S34, S35, S37, S38, S39, S40, S41, S42, S44, S47, S48, S49, S50, S51, S52, S53, S54, S55.

Fusion : S210, 211, 212, 213.


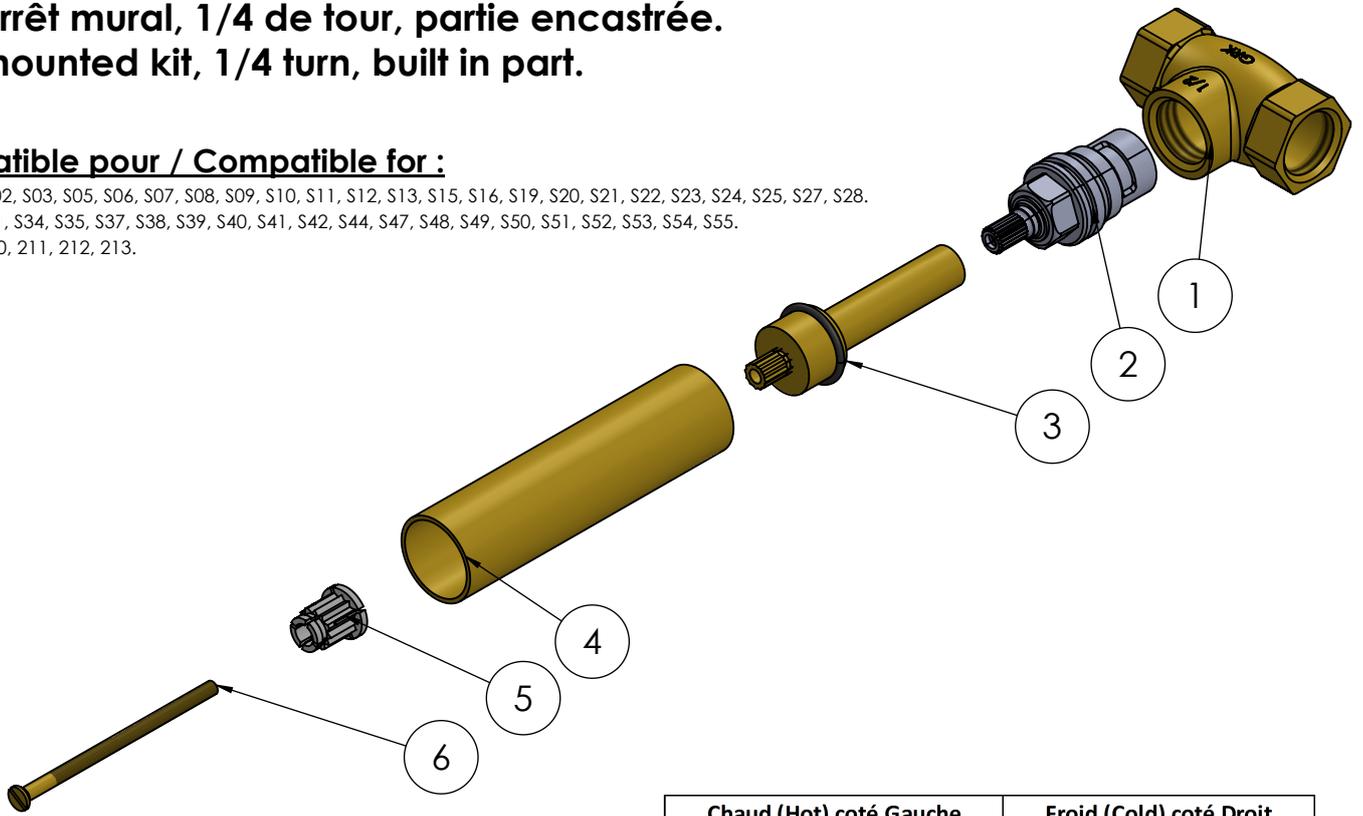


		Chaud (Hot) coté Gauche		Froid (Cold) coté Droit		
		S00-A2-25K28H		S00-A2-25K28C		
G1/2"	1	Robinet à encastrer G1/2	S00-AA-2VB2	RA0020B	S00-AA-2VB2	RA0020B
	2	Tête disque céramique G1/2	S00-AA-2CC1	RA0035G	S00-AA-2CC2	RA0035D
	3	Rallonge arret mural L75	S00-AA-2F2	TRAM1	S00-AA-2F2	TRAM1
	4	Tube arrêt mural $\phi 26$ L98	S00-A2-2F6	ATM2	S00-A2-2F6	ATM2
	5	Insert 20 dents	S00-AA-D20	RA00465	S00-AA-D20	RA00465
	6	Vis M4x70	S00-AA-M4L70	V773L	S00-AA-M4L70	V773L
		S00-A2-25K29H		S00-A2-25K29C		
G3/4"	1	Robinet à encastrer G3/4	S00-AA-2VB3	RA0021B	S00-AA-2VB3	RA0020B
	2	Tête disque céramique G3/4	S00-AA-2CC5	RA0037G	S00-AA-2CC6	RA0037D
	3	Rallonge arret mural L75	S00-AA-2F2	TRAM1	S00-AA-2F2	TRAM1
	4	Tube arrêt mural $\phi 26$ L98	S00-A2-2F6	ATM2	S00-A2-2F6	ATM2
	5	Insert 20 dents	S00-AA-D20	RA00465	S00-AA-D20	RA00465
	6	Vis M4x70	S00-AA-M4L70	V773L	S00-AA-M4L70	V773L


G3/4"

G1/2"

ϕ de perçage recommandé.
 ϕ recommended drilling.

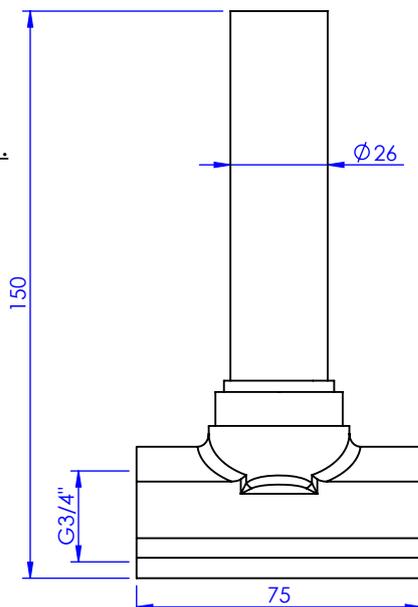

Débit / Flow rate : 36 l/min (sous 3 bars)
Pressionn maxi / max pressure : 5 bars.

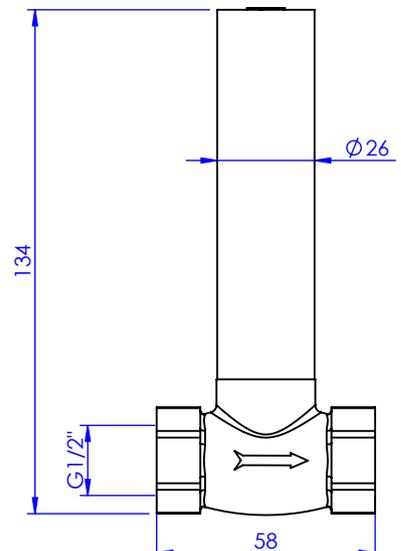

Débit / Flow rate : 21 l/min (sous 3 bars)
Pressionn maxi / max pressure : 5 bars.